





STYLE CNC Machines


STYLE CNC Lathe 850 - 1500 (DBC 1000 - 16000 mm)

New Product Line

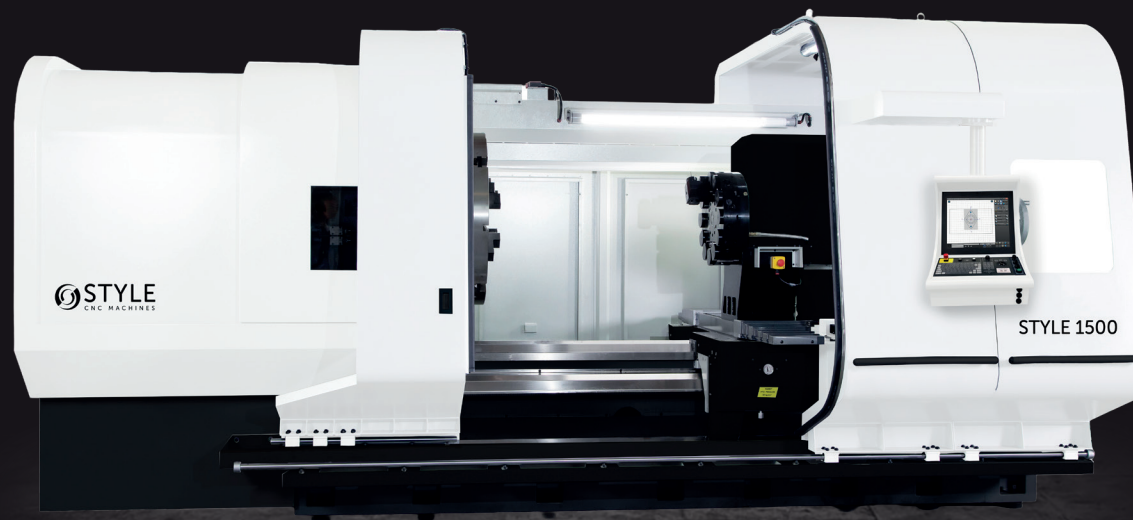

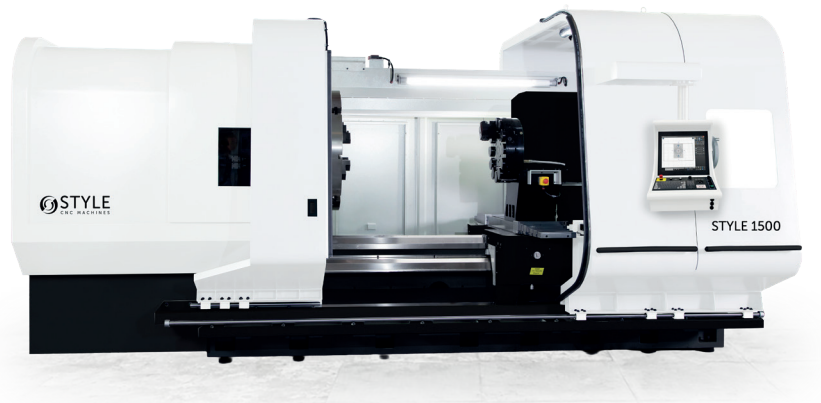

STYLE 850 ~ 1500 Open sheetmetal (standard)

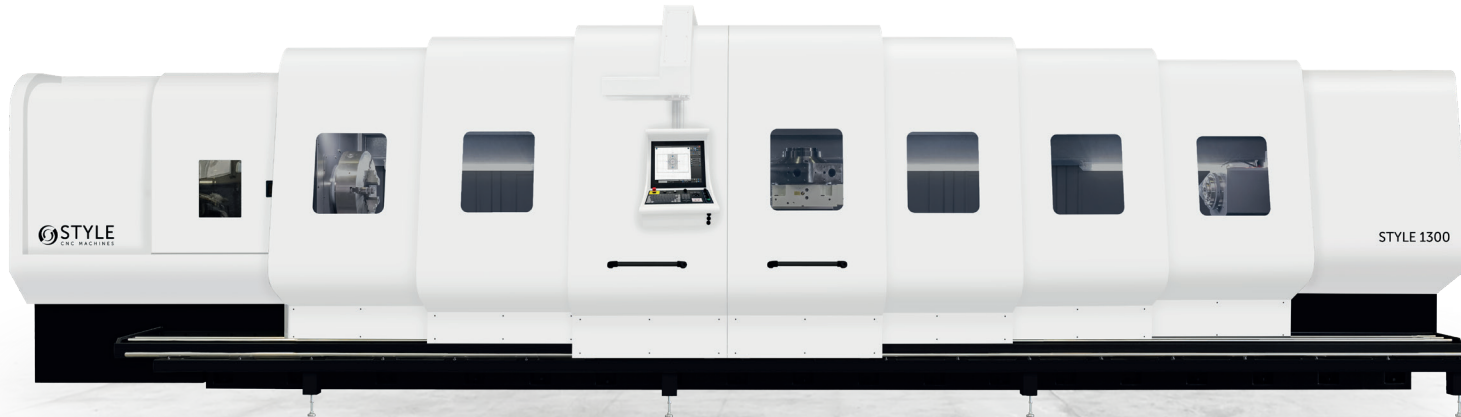

STYLE 850 ~ 1500 Full enclosed sheetmetal (optional)

Standard equipped with an automatic chip conveyor. Optionally expandable with an automatic tool changer, a positioned C-axis, and an automatic tool changer with driven tools.

STYLE CNC Lathes

850 - 1500 serie

Machine		STYLE 850	STYLE 1000	STYLE 1100	STYLE 1200	STYLE 1300	STYLE 1400	STYLE 1500
Swing over bed	mm	850	1000	1100	1200	1300	1400	1500
Swing over support	mm	510	650	750	820	920	1020	1120
Distance between centers	mm	1000 / 1500 / 2000 / 3000 / 4000 / 5000 / 6000 / 7000 / 8000 / 9000 / 10000 / 11000 / 12000 / 13000 / 14000 / 15000 / 16000			1500 / 2000 / 3000 / 4000 / 5000 / 6000 / 7000 / 8000 / 9000 / 10000 / 11000 / 12000 / 13000 / 14000 / 15000 / 16000			
Bed width	mm	558	558	558	692	692	692	692
Number of guides		3	3	3	3	3	3	3

Main spindle

Main motor power (S6)	kW	37 / 45 / 55	37 / 45 / 55	37 / 45 / 55	37 / 45 / 55			
Spindle bore	ø mm	130 / 165 / 230	130 / 165 / 230 / 305	130 / 165 / 230 / 305 / 360 / 410	165 / 230 / 305 / 360 / 410 / 550			
Maximum spindle speed	rpm	1200 / 660 / 660	1200 / 660 / 660 / 400	1200 / 660 / 660 / 400 / 300 / 250	660 / 660 / 400 / 300 / 250 / 250			
Spindle taper		D1-11 / A2-11 / A2-15	D1-11 / A2-11 / A2-15 / A2-20	D1-11 / A2-11 / A2-15 / A2-20 / A2-20 / A2-28	A2-11 / A2-15 / A2-20 / A2-20 / A2-28 / A2-28			

Workpiece weight (balanced relative to the spindle bore)

Chuck	kg	800	1000	1400
Chuck + tailstock	kg	3000	4000	4400
Chuck + tailstock + 1 steady rest	kg	5000	7000	7400
Chuck + tailstock + 2 steady rests	kg	6000	10000	10400

130 ¹	165	230~410
------------------	-----	---------

165	230~550
-----	---------

X- and Z- axis

X-axis movement	mm	430	500	550	600	650	700	750
Z-axis movement	mm	DBC minus 350	DBC minus 350	DBC minus 350	DBC minus 650	DBC minus 650	DBC minus 650	DBC minus 650
Rapid movement	m/min	5	5	5	5	5	5	5
Feed rate	m/min	5	5	5	5	5	5	5

Tailstock

Quill	ø mm	115 ² / 160 ² / 250 ³	115 ² / 160 ² / 250 ³	115 ² / 160 ² / 250 ³	140 ² / 200 ² / 300 ⁴	140 ² / 200 ² / 300 ⁴	140 ² / 200 ² / 300 ⁴	140 ² / 200 ² / 300 ⁴
Quill stroke	mm	230	230	230	330	330	330	330
Quill taper	MK	6	6	6	6	6	6	6

General

Weight	kg	7700 / 8400 / 9100 / 10500 / 11900 13300 / 14700 / 16100 / 17500 / 18900 / 20300 / 21700 / 23100 / 24500 / 25900 / 27300 / 28700			10500 / 11000 / 12000 / 13000 / 14000 / 15000 / 16000 / 17000 / 18000 / 19000 / 20000 / 21000 / 22000 / 23000 / 24000 / 25000			
Machine dimensions (l/w/h)	length in mm	4080 / 4580 / 5080 / 6080 / 7080 / 8080 / 9080 / 10080 / 11080 / 12080 / 13080 / 14080 / 15080 / 16080 / 17080 / 18080 / 19080			4930 / 5430 / 6430 / 7430 / 8430 / 9430 / 10430 / 11430 / 12430 / 13430 / 14430 / 15430 / 16430 / 17430 / 18430 / 19430			
	width in mm	2960	2960	2960	2960	2960	2960	2960
	height in mm	2550	2550	2550	2550	2550	2550	2550

¹ Possible spindle taper D1-11 & A2-11

² Not possible with live Quill

³ Always complete hydraulic tailstock (Quill + Body) with live Quill (MT6) & spindle taper A2-8

⁴ Always complete hydraulic tailstock (Quill + Body) with live Quill (MT6) & spindle taper A2-11

STYLE CNC Machines

The best CNC machines for single pieces and small series

STYLE CNC Machines BV The Netherlands

Office and letter box post
Het Steenland 15
3751 LA Bunschoten

Delivery of goods
Het Steenland 25
3751 LA Bunschoten



STYLE The Netherlands (Assembly, Showroom and Service)



STYLE Poland (Showroom and Service)



STYLE Czech Republic (Showroom and Service)

Prices and specifications likely to change without notice

www.stylecncmachines.com edition: 2025 version: 250618



Disclaimer

This brochure has been compiled with the utmost care. No rights can be derived from any inaccuracies.
Price changes and/or printing errors reserved.

Intellectual property rights

All data, design, software, etc. contained in this brochure are protected by intellectual property law.
No part of this brochure may be copied or reproduced without prior written permission.

