



STYLE CNC Machines

The best CNC machines for single pieces and small series

Product overview





STYLE 300



STYLE 350



STYLE 510



STYLE 650 / 750



STYLE 1000 ~ 2200



STYLE CNC Lathes

300 - 2200 series

Machine		STYLE 300	STYLE 350	STYLE 510	STYLE 650	STYLE 750	STYLE 1000 ~ 2200
Swing over bed	mm	320	380	510	650	750	1000 ~ 2200
Swing over support	mm	180	190	300	430	530	600 ~ 1720
Distance between centers	mm	500	850	1350 / 1850 ¹	1000 / 2000 / 3000 / 4000 / 5000	1000 / 2000 / 3000 / 4000 / 5000	1000 ~ 12000
Bed width	mm	190	305	330	450	450	560 ~ 920
Maximum weight between centers	kg	200	300	600 / 750 ²	1800	1800 / 2300 ²	3200 ~ 9000
Main spindle							
Main motor power (S6)	kW	5.5	5.5 / 7.5 / 11	7.5 / 11 / 15	22 / 26 / 37	22 / 26 / 37	37 / 45 / 55
Spindle bore	ø mm	40	54	80 / 102	105	105 / 155 / 180 / 230	150 ~ 810
Maximum spindle speed	rpm	4000	3000 / 4000	2500 ⁽⁸⁰⁾ / 2100 ⁽¹⁰²⁾	2000	2000 ⁽¹⁰⁵⁾ / 1500 ⁽¹⁵⁵⁾ 1250 ⁽¹⁸⁰⁾ / 1000 ⁽²³⁰⁾	1200 ~ 120
Spindle taper		A2-5	D1-6	D1-8	A2-11	A2-11 / A2-15	A2-11 ~ A2-40
X- and Z- axis							
Rapid movement	m/min	8	8	8	8	8	on request
Feed rate	m/min	1	2	2	2	2	on request
Tail stock							
Quill	ø mm	40	54	75 / 80 ²	105	105 / 125 ²	145 ~ 235
Quill stroke	mm	100	100	160	225	225	200
Quill taper	MT	3	4	5	5	5 / 6	5 / 6
General							
Weight	kg	800	2000	2700 / 3250	4850 / 5850 / 6950 / 8050 / 9150	4950 / 5950 / 7050 / 8150 / 9250	on request
Machine dimensions (l/w/h)	m	2.1 x 1.0 x 1.2	2.5 x 1.8 x 1.8	3.2 x 1.8 x 1.8 ⁽¹³⁵⁰⁾	3.3 x 2.3 x 2.2 ⁽¹⁰⁰⁰⁾	3.3 x 2.3 x 2.2 ⁽¹⁰⁰⁰⁾	
				3.7 x 1.8 x 1.8 ⁽¹⁸⁵⁰⁾	4.3 x 2.3 x 2.2 ⁽²⁰⁰⁰⁾	4.3 x 2.3 x 2.2 ⁽²⁰⁰⁰⁾	
					5.3 x 2.3 x 2.2 ⁽³⁰⁰⁰⁾	5.3 x 2.3 x 2.2 ⁽³⁰⁰⁰⁾	
					6.3 x 2.3 x 2.2 ⁽⁴⁰⁰⁰⁾	6.3 x 2.3 x 2.2 ⁽⁴⁰⁰⁰⁾	
					7.3 x 2.3 x 2.2 ⁽⁵⁰⁰⁰⁾	7.3 x 2.3 x 2.2 ⁽⁵⁰⁰⁰⁾	
Options							
Automatic chip conveyor		-	option	option	standard	standard	standard ³
Automatic tool changer		-	option	option	option	option	option
Positioned C-axis		-	-	-	option	option	option
Automatic tool changer with driven tools		-	-	-	option	option	option ⁴
		education				on request	

¹ With a heavy tail stock dbc becomes 1200/1700
²Possible with heavy duty tail stock
³Two standard chip conveyors included
⁴Automatic changer at front of X-support



STYLE CNC Milling machines

BT 600 - 4000 series

Machine		BT 600	BT 1000	BT 1500	BT 1500+	BT 2000	BT 3000	BT 2000L / 2500L	BT 3000L / 4000L
X-axis movement	mm	600	1000	1500	1500	2000	3000	2000 / 2500	3000 / 4000
Y-axis movement	mm	450	550	650	650	800	800	1000	1250
Z-axis movement	mm	550	650	600	700	700 ¹ / 800 ²	700 ¹ / 800 ²	900	1000
Bed width	mm	370	580	700	700	1250	1810	on request for any model	
Dimensions work table	mm	700 x 450	1400 x 410	1850 x 610	1850 x 610	2200 x 600	3200 x 800	2330 x 760 2830 x 760	3200 x 1000 4200 x 1000
Maximum table load	kg	300	500	1000	1000	1500 ¹ / 2000 ²	3000	2000 / 2250	3000 / 3500
Height work table	mm	800	810	850	850	900	950	900	900
Distance spindle nose to table	mm	110 - 660	150 - 800	130 - 730	80 - 780	120 - 820 ¹ 220 - 1020 ²	120 - 820 ¹ 180 - 980 ²	100 - 1100	100 - 1100
Distance spindle nose to column	mm	545	610	625	660	880	880	915	1080
Main spindle									
Main motor power (S6)	kW	5.5 / 7.5 / 11	7.5 / 11 / 15	7.5 / 11 / 15	11 / 15 / 18.5	11 / 15 / 18.5 / 22 / 26	22 / 26 / 37 / 45	11 / 15 / 18.5 / 22 / 26	22 / 26 / 37 / 45 / 55
Maximum spindle speed	rpm	8000 - 12000	8000 - 12000	8000 - 12000	6000 - 12000	6000 - 12000 ¹ 6000 - 8000 ²	6000 - 12000 ¹ 6000 - 8000 ²	6000 - 12000 ¹ 6000 - 8000 ²	6000 - 12000 ¹ 6000 - 8000 ²
Spindle taper	BT - SK/DIN69871 ³	40	40	40	40	40 / 50	40 / 50	40 / 50	
X-, Y- and Z- axis									
Rapid movement	m/min	16	8	8	8	8	8	8	
Feed rate	m/min	4	4	4	4	4	4	4	
Tool changer									
Automatic tool changer	#	12 ⁴ / 16 ⁵	24 ⁶	24 ⁶	24 ⁶	24 ⁶	24 ⁶	24 ~ 30 ⁶	
General									
Weight	kg	3000	3800	5300	5800	8500 ¹ / 12500 ²	11700 ¹ / 14000 ²	on request for any model	
Machine dimensions (l/w/h)	m	2.5 x 1.9 x 2.4	2.8 x 2.0 x 2.5	3.1 x 2.3 x 2.5	3.1 x 2.3 x 2.8	3.8 x 3.0 x 2.9	7.4 x 3.1 x 2.9	on request for any model	
Options									
Sheet metal		open / semi	open / semi	open / semi	open / semi	open / semi / closed	open / semi / closed	open / closed	
Integrated 4th axis		option	option	option	option	option	option	option	
Coolant through the spindle		MC 750	MC 1000	MC 1500	MC 1500	option	option	option	

¹ Spindle taper 40
⁴Horizontal

²Spindle taper 50
⁵Vertical

³ Choose for a BT or SK/DIN69871 spindle taper
⁶Choice of vertical / horizontal

on request



MC 350



MC 500



MC 750



MC 1000



MC 1500



STYLE CNC Machining center

MC 350 - 2500 series

Machine		MC 350	MC 500	MC 750	MC 1000	MC 1500	MC 2000	MC 2500
X-axis movement	mm	350	500	760	1000 (1500)	1500	2000	2500
Y-axis movement	mm	210	380	440	510	680	950	950
Z-axis movement	mm	340	400	460	510	880	880	880
Table size	mm	810 x 250	650 x 380	900 x 410	1070 (1570) x 500	1700 x 600	2330 x 760	2330 x 760
Maximum table load	kg	80	200	350	600	1000	1500	1500
Height work table	mm	850	805	820	910	860	1030	1030
Distance spindle nose to work table	mm	50 - 390	150 - 550	100 - 560	120 - 630	100 - 980	100 - 980	100 - 980
Distance spindle nose to column	mm	260	435	475	625	720	915	915
Main spindle								
Main motor power (S6)	kW	3.7 / 5.5	3.7 / 5.5 / 7.5	5.5 / 7.5 / 11	11 / 15 / 18.5	11 / 15 / 18.5	11 / 15 / 18.5	11 / 15 / 18.5
Maximum spindle speed	rpm	8000	12000	8000 - 10000	10000 - 12000	10000 - 12000	10000 - 12000	10000 - 12000
Spindle taper	BT - SK/DIN69871 ¹	30	30	40	40	40	40	40
X-, Y- and Z- axis								
Rapid movement	m/min	15	24	24	24	24	18	18
Feed rate	m/min	10	10	10	12	12	12	12
Tool changer								
Automatic tool changer	#	8	20	16 / 24	20 / 24 / 30	20 / 24 / 30	24 / 30	24 / 30
General								
Weight	kg	1400	2900	3600	6700 (7300)	8800	on request	on request
Machine dimensions (l/w/h)	m	1.4 x 1.4 x 2.0	1.6 x 2.2 x 2.4	2.2 x 2.3 x 3.0	3.0 (4.0) x 2.6 x 2.6	4.2 x 2.8 x 3.2	on request	on request
education								

¹ Choice of BT of SK/DIN69871 spindle taper

STYLE CNC Slant bed lathe

SB 250 - 500 series

Machine		SB 250	SB 300	SB 500
Maximum swing	mm	420	505	612
Swing over carriage cover	mm	330	318	390 (700) / 420 (1200)
Maximum turned length	mm	550	570 / 1000	700 / 1200
Main spindle				
Main motor power (S6)	kW	15 / 18.5	15 / 18.5 / 22	15 / 18.5 / 22 / 26
Maximum spindle speed	rpm	4800 / 6000	3500 / 4000 / 4500 / 6000	2500 / 2700 / 3500
Spindle bore through draw bar	Ø mm	52 / 44	75 / 65 / 52 / 44	105 / 90 / 75
Hydraulic chuck diameter	Ø mm	170 / 200	160 / 200 / 250	250 / 300 / 380
X- and Z-axis				
Rapid movement X / Z	m/min	12 / 20	20 / 20	20 / 24
Feed rate	m/min	10	10	10
X / Z axis slide way configuration		Linear	Linear / Box	Box
Turret system				
Tool change		Servo	Servo / Hydraulic	Servo / Hydraulic
Tool taper		BOT / VDI	BOT / VDI	BOT / VDI
Size		30	30 / 40	40
Number of positions	#	8 / 10	8 / 10 / 12	12
General				
Weight	kg	3800	4300 / 4800	5500 / 6000
Machine dimensions (l/w/h)	m	3.6 x 1.7 x 1.9	2.9 x 1.6 x 1.7 3.7 x 1.6 x 1.7	3.0 x 1.8 x 1.8 4.2 x 1.9 x 2.0



STYLE Conventional lathes

ZMM series

Machine		Minimum value	Maximum value
Turning diameter over bed	mm	325	1410
Turning diameter over support	mm	190	1000
Turning diameter over sack	mm	440	1500
Spindle bore	mm	32	358
Bed width	mm	200	800
Main motor power	kW	2.2	45
Maximum rotation per minute	rpm	315	2240
Number of gears		2	24
Diameter pinole	mm	40	200
Distance between centers	mm	500	10000




STYLE Special Projects

A machine customised together.

- Together we can assess your products that you have to machine.
- Together we can discuss how to fixture and clamp your products in combination with the machining of them.
- Together we define other necessary wishes and requirements

We offer you a tailor-made quotations guaranteeing the best price-quality machine for the optimal machining of your products.



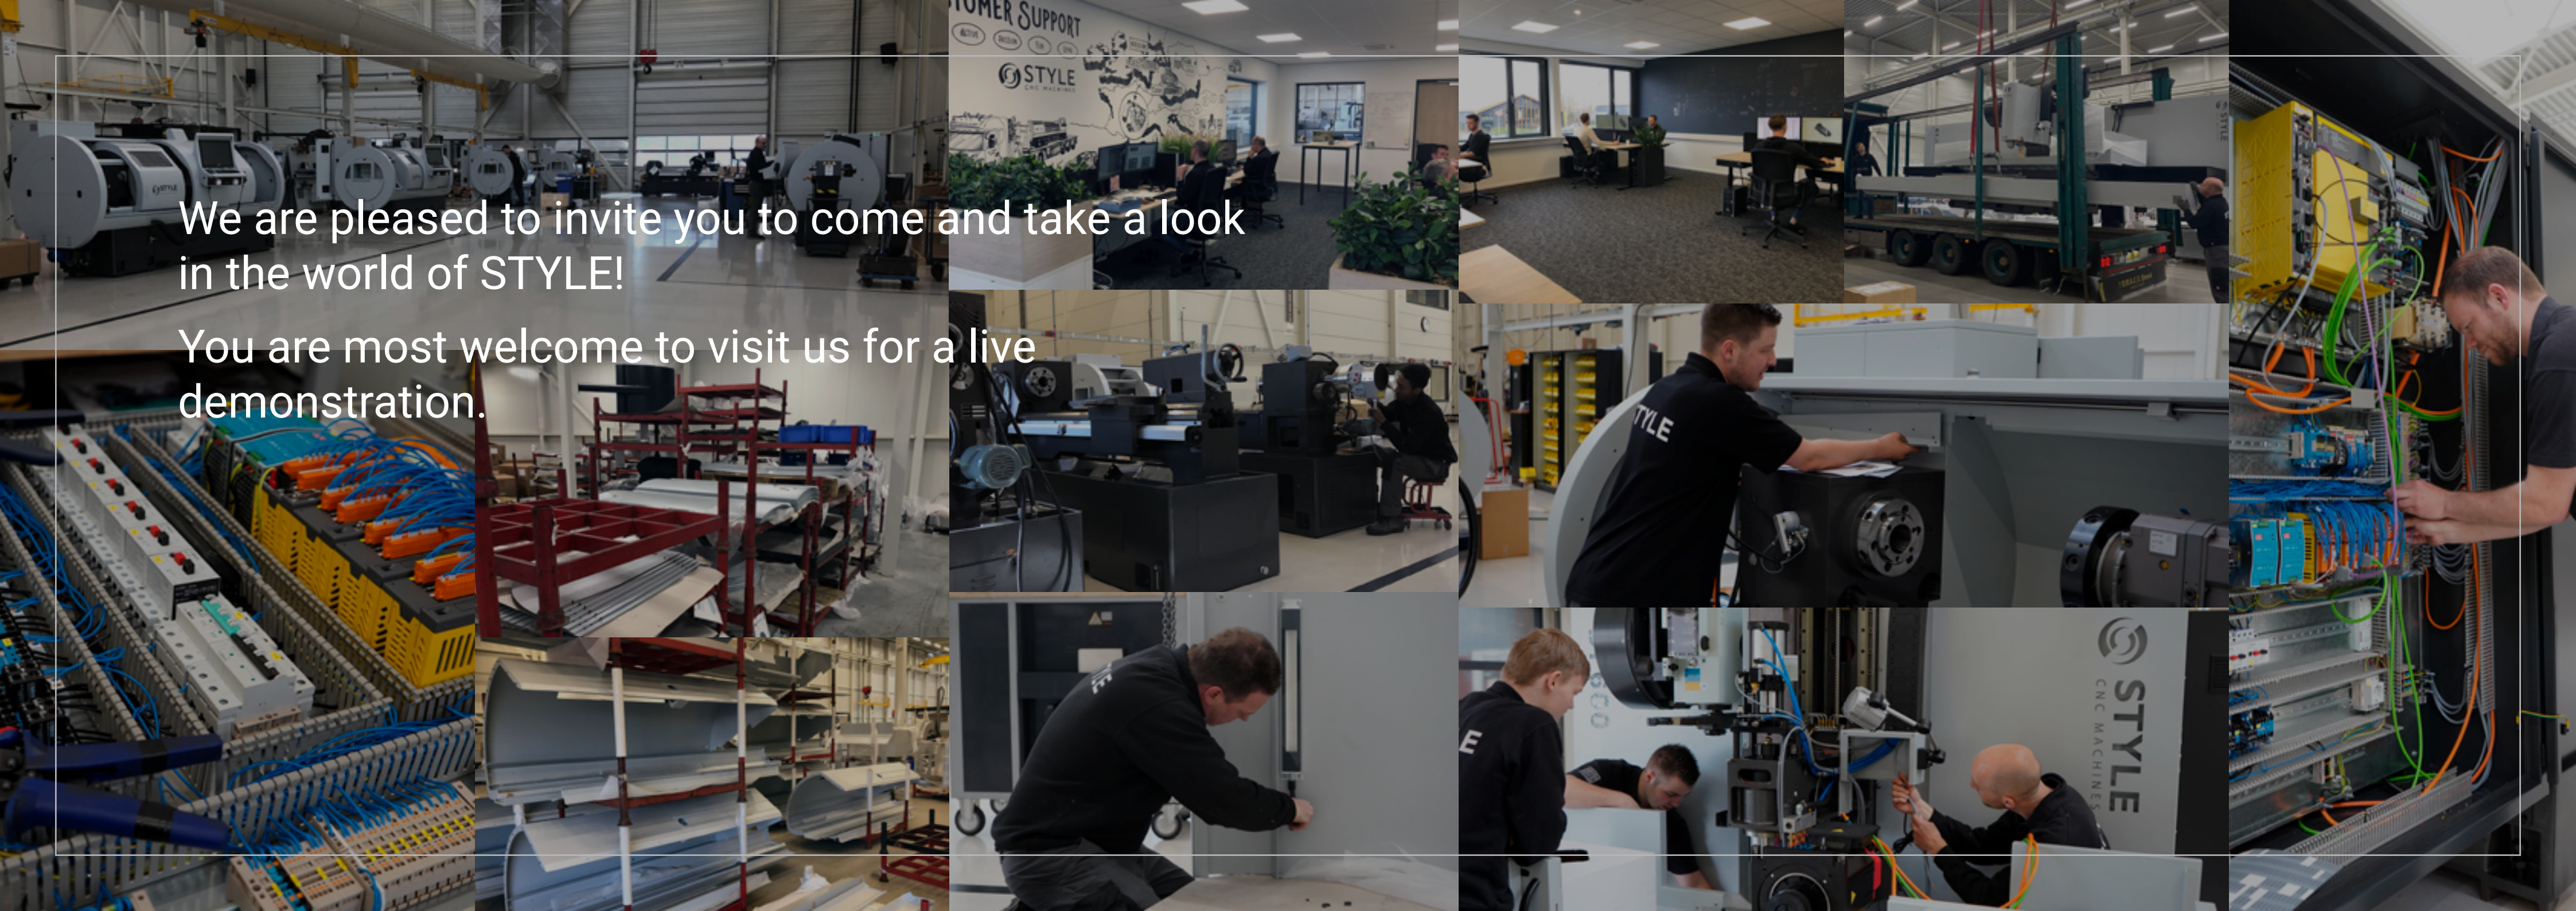

We are pleased to invite you to come and take a look
in the world of STYLE!

You are most welcome to visit us for a live
demonstration.

STYLE CNC Machines

The best CNC machines for single pieces and small series

STYLE CNC Machines BV The Netherlands

Office and letter box post
Het Steenland 15
3751 LA Bunschoten

Delivery of goods
Het Steenland 25
3751 LA Bunschoten

STYLE CNC Machines BV Belgium

Visiting address
Twee-Bruggenstraat 64/201
B-8530 Harelbeke



STYLE The Netherlands (assembly, service & sales)



STYLE Poland (service & sales)



STYLE Czech Republic (service & sales)

Prices and specifications likely to change without notice

www.stylecncmachines.com edition: 2025 version: 250618



Disclaimer

This brochure has been compiled with the utmost care. No rights can be derived from any inaccuracies. Price changes and/or printing errors reserved.

Intellectual property rights

All data, design, software, etc. contained in this brochure are protected by intellectual property law. No part of this brochure may be copied or reproduced without prior written permission.

